


2S42Q-03848

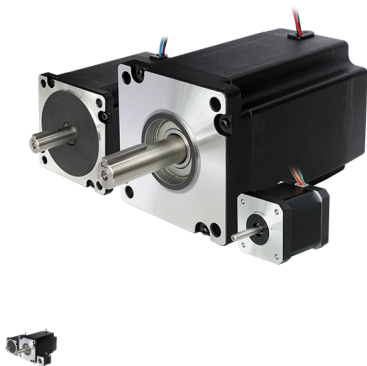

- Phase Current (A): 1.2
- Holding Torque (Nm): 0.32

Rating: Not Rated Yet
Price

[Ask a question about this product](#)

Manufacturer[Maker: Kinco](#)

Description	Technical Specifications	2S42Q-03848
	Step Angle	1.8°±5%
	Phase Current (A)	1.2
	Holding Torque (Nm)	0.32
	Damping Torque (Nm)	0.02
	Winding Resistance (?)	3.2±10%
	Winding Inductance (mH)	6.0±20%
	Motor Inertia (kg.cm²)	0.08
	Motor Length L (mm)	48
	Motor Length L1 (mm)	24±0.5
	Number Of Lead Wires	4
	Insulation Class	B
	Withstand	300V AC 1S

Voltage Level	5mA
Max. Axial Load (N)	10
Max. Radial Load (N)	21
Operating Temperature	-20?~50?
Surface Temperature Rise	Max.80? (Rated Phase Current After Two Phases Are Connected)
Insulation Impedance	Minimum 100M?, 500V DC
Weight (kg)	0.34
Lead Wire Length (mm)	400±5

[Kinco Catalog Stepper Motors 2S42Q-03848](#)

[2S42Q-03848 Dimensions](#)