


2S56Q-02976

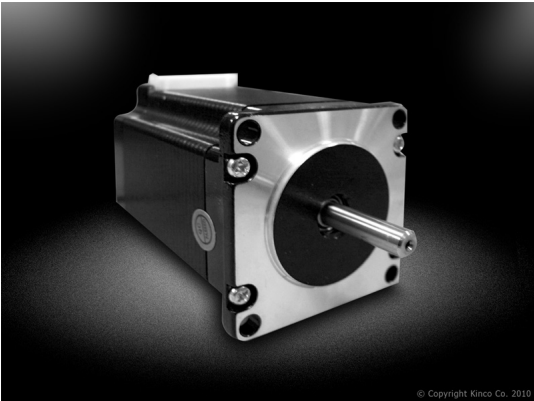

- Phase Current(A): 1.5~6
- Holding Torque(Nm): 0.5~2.5
- Flange Dimension(mm): 56.4

Rating: Not Rated Yet

Price

Sales price without tax 53,00 €

[Ask a question about this product](#)

Manufacturer[Maker: Kinco](#)

Description	Model	2S56Q-030B5	2S56Q-02976	2S56Q-02054	2S56Q-02741
	Step Angle	1.8 degrees ±5%			
	Phase Current (A)	6	3	3	1.5
	Holding Torque (Nm)	2.5	1.5	0.9	0.5
	Damping Torque (Nm)	0.17	0.07	0.04	0.02
	Winding Resistance (?)	0.5±10 %	0.95±10 %	0.65±10 %	1.8±10 %
	Winding Inductance(mH)	1.5±20 %	3.4±20 %	2.5±20 %	4.1±20 %
	Motor Inertia (Kg.com²)	0.7	0.46	0.26	0.14
	Motor	115	76	54	41

Length L(mm)				
Number of Lead Wires	4			
Insulation Class	B			
Withstand Voltage Level	500VAC,one minute			
Max.Axial Load (N)	15			
Max.Radial Load (N)	75			
Operating Temperature	-20??50?			
Surface Temperature Rise	Max.80? ?Rated Phase Current after Two Phases are Connected)			
Insulation Impedance	Minimum 100M?,500VDC			
Weight (Kg)	1.5	1	0.6	0.42
Lead Wire Length (mm)	300±10	300±5		

[Stepper System](#)