


2S57Q-2280

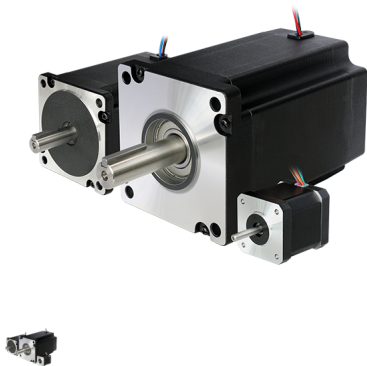

- Phase Current (A)Series: 2.8 Parallel: 5.6
- Holding Torque: 2.2

Rating: Not Rated Yet
Price
Sales price without tax 65,00 €

[Ask a question about this product](#)

Manufacturer[Maker: Kinco](#)

Description	Technical Specifications		2S57Q-2280
	Step Angle		1.8°
	Phase Current (A)	Series	2.8
		Parallel	5.6
	Holding Torque (Nm)		2.2
	Damping Torque (Nm)		0.07
	Winding Resistance (?)		0.8±10%
	Winding Inductance (mH)		1.8±20%
	Motor Inertia (kg.cm)		0.53
	Motor Length L (mm)		80
	Shaft Diameter (mm)		8
	Number Of Lead Wires		8
	Insulation Class		B
	Withstand Voltage Level		500VAC For 1minute
	Max. Axial Load (N)		15N
	Max. Radial Load (N)		75N (20mm

Stepper Motors: 2S57Q-2280

	From The Flange)
Operating Temperature	-20??+50?
SurfaceTemperature Rise	Max.80? (Both Phases Connecte d With Rated Current)
Insulation Impedance	Minimum 100M?, 500V DC
Weight (kg)	1.1
No-Load Start Frequency	12K
Ingress Protection	IP40

[2S57Q-2280 Dimensions](#)

[KincoCatalog Stepper](#)