


2S86Q-051F6

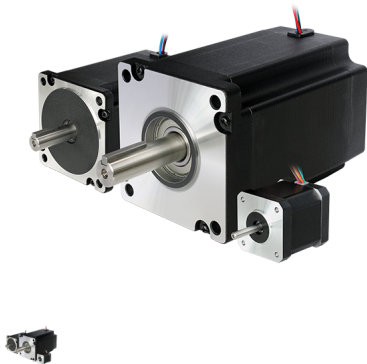

- Phase Current (A): 6.0
- Holding Torque (Nm): 12.8

Rating: Not Rated Yet

Price

Sales price without tax 210,00 €

[Ask a question about this product](#)

Manufacturer[Maker: Kinco](#)

Description	Technical Specifications	2S86Q-051F6
	Step Angle	1.8°
	Phase Current (A)	6.0
	Holding Torque (Nm)	12.8
	Damping Torque (Nm)	0.36
	Winding Resistance (?)	0.85±10%
	Winding Inductance (mH)	10±20%
	Motor Inertia (kg.cm)	4
	Motor Length L (mm)	156
	Shaft Diameter (mm)	15.875
	Number Of Lead Wires	4
	Insulation	B

Stepper Motors: 2S86Q-051F6

Class	
Withstand Voltage Level	1200VAC 1S 5mA
Max. Axial Load (N)	60
Max. Radial Load (N)	220
Operating Temperature	-20??+50?
Surface Temperature Rise	Max.80? (Both Phases Connected With Rated Current)
Insulation Impedance	Minimum 100M?, 500V DC
Weight (kg)	5.3
Startup Freq. With No Load(Hz)*	5.8K
Ingress Protection	IP40

[2S86Q-051F6 Dimensions](#)

[KincoCatalog Stepper](#)