
# 2S110Q-03999



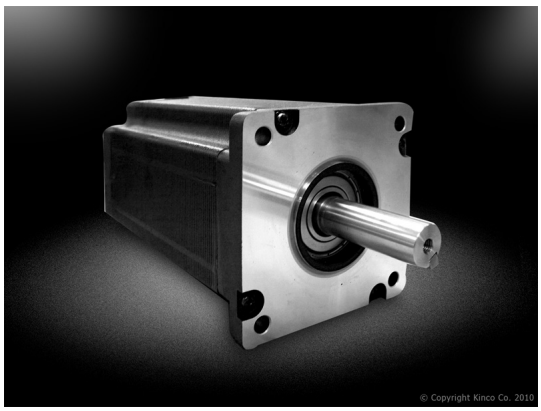


- Phase Current(A): 5.5-8
- Holding Torque(Nm): 11.7-28
- Flange Dimension(mm): 109.86

Rating: Not Rated Yet
**Price**
Sales price without tax 169,00 €

Ask a question about this product

ManufacturerELCON | Systems & Components

| Description | Model | 2S110Q-02 54K1 | 2S110Q-02 47F0 | 2S110Q-0 3999 |
|---|---|---|---|---|
| | **Step Angle** | 1.8 Degrees ±5% | | |
| | **Phase Current (A)** | 8 | 6.5 | 5.5 |
| | **Holding Torque (Nm)** | 28 | 21 | 11.7 |
| | **Damping Torque (Nm)** | 0.75 | 0.59 | 0.3 |
| | **Winding Resistance (?)** | 0.67±10% | 0.72±10% | 0.7±10% |
| | **Winding Inductance(mH)** | 12.5±20% | 12.8±20% | 9.8±20% |
| | **Motor Inertia (Kg.com²)** | 16.2 | 10.9 | 5.5 |
| | **Motor** | 201 | 150 | 99 |

| | | | |
|---|---|---|---|
| **Length L(mm)** | | | |
| **Number of Lead Wires** | 4 | | |
| **Insulation Class** | B | | |
| **Withstand Voltage Level** | 500VAC,One Minute | | |
| **Max.Axial Load (N)** | 60 | | |
| **Max.Readial Load (N)** | 220 | | |
| **Operating Temperature** | -20??50? | | |
| **Surface Temperature Rise** | Max.80? ?Rated Phase Current After Two Phases are Connected) | | |
| **Insulation Impedance** | Minimum 100M?,500VDC | | |
| **Weight (Kg)** | 11.7 | 8.4 | 5 |

Stepper System