
2S110Q-054K1



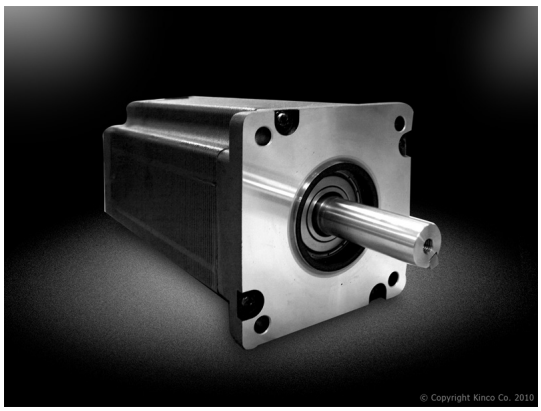

- Phase Current(A): 5.5-8
- Holding Torque(Nm): 11.7-28
- Flange Dimension(mm): 109.86

Rating: Not Rated Yet
Price
Sales price without tax 301,00 €

Ask a question about this product

ManufacturerELCON | Systems & Components

Description	Model	2S110Q-054K1	2S110Q-047F0	2S110Q-03999
	Step Angle	1.8 Degrees ±5%		
	Phase Current (A)	8	6.5	5.5
	Holding Torque (Nm)	28	21	11.7
	Damping Torque (Nm)	0.75	0.59	0.3
	Winding Resistance (?)	0.67±10%	0.72±10%	0.7±10%
	Winding Inductance(mH)	12.5±20%	12.8±20%	9.8±20%
	Motor Inertia (Kg.com²)	16.2	10.9	5.5
	Motor	201	150	99

Length L(mm)			
Number of Lead Wires	4		
Insulation Class	B		
Withstand Voltage Level	500VAC,One Minute		
Max.Axial Load (N)	60		
Max.Readial Load (N)	220		
Operating Temperature	-20??50?		
Surface Temperature Rise	Max.80? ?Rated Phase Current After Two Phases are Connected)		
Insulation Impedance	Minimum 100M?,500VDC		
Weight (Kg)	11.7	8.4	5

Stepper System