
3S57Q-04056

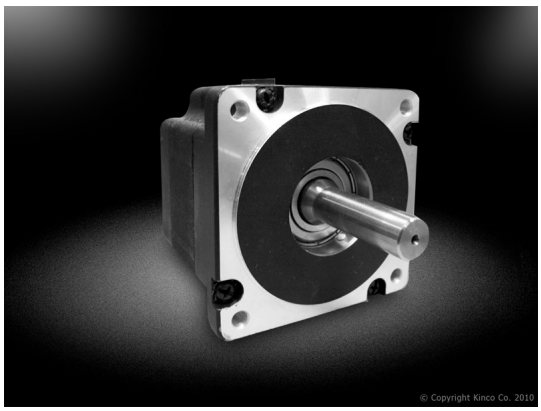

- Phase Current(A):5.2~5.8
- Holding Torque(Nm):0.45~1.5
- Flange Dimension(mm):56.4

Rating: Not Rated Yet
Price
Sales price without tax 48,00 €

Ask a question about this product

ManufacturerELCON | Systems & Components

Description	Model	3S57Q-04079	3S57Q-04056	3S57Q-04042
	Step Angle		1.2?±5%	
	Phase Current (A)	5.8	5.6	5.2
	Holding Torque (Nm)	1.5	0.9	0.45
	Damping Torque (Nm)	0.07	0.04	0.02
	Winding Resistance (?)	1.05±10%	0.7±10%	1.3±10%
	Winding Inductance(mH)	2.4±20%	1.7±20%	1.4±20%
	Motor Inertia (Kg.com²)	0.48	0.3	0.11
	Motor	79	56	42

Length L(mm)			
Number of Lead Wires	6		
Insulation Class	B		
Withstand Voltage Level	600VAC 1S 5mA		
Max.Axial Load (N)	15		
Max.Readial Load (N)	75		
Operating Temperature	-20??50?		
Surface Temperature Rise	Max.80? ?Rated Phase Current after Phases are Connected)		
Insulation Impedance	Minimum 100M?,500VDC		
Weight (Kg)	1	0.72	0.45

Stepper System