


## SMH110D-0126-20AA

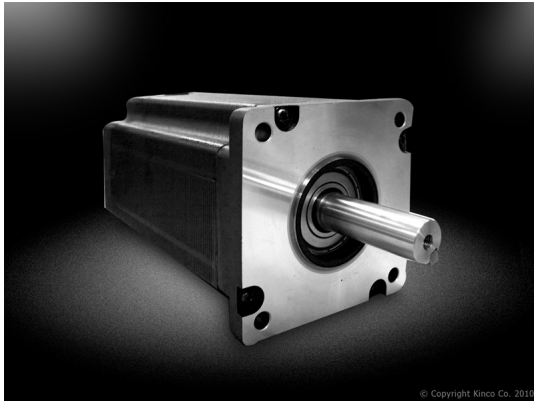

????????????????????

- ??????? 110mm
- ??? 1.05KW ??? 1.88KW ????
- 2000rpm/3000rpm
- 8 ?????
- 2500ppr incremental encoder, 5-6 Nm

?????????: ??? ?????????????????

**Price**

Sales price without tax 623,00 €

[???????? ??? ?? ??????](#)

Manufacturer [ELCON | Systems & Components](#)

Description	Motor Series Model	Medium Inertia, Flange Size 110mm					
		SMH110D-0125-	SMH110D-0126-	SMH110D-0105-	SMH110D-0157-	SMH110D-0126-	SMH110D-0188-
Compatible Driver		30AAK-4LKX CD430-0125-	30AAK-4HKX CD620-0126-	20AAK-4LKX CD430-0105-	30AAK-4HKX CD620-0157-	20AAK-4LKX CD430-0126-	30AAK-4HKX CD620-0188-
DC Link Voltage		0065-AA-000 300	0043-AA-000 560	0054-AA-000 300	0054-AA-000 560	0062-AA-000 300	0062-AA-000 560
UDC Rated Power		1250	1260	1050	1570	1260	1880
PN(W) Rated Torque TN(Nm) Rated		4	4	5		6	
Speed nN(Rpm) Rated Current IN (A)		3000	3000	2000	3000	2000	3000
Maximum Torque		6.5	4.3	5.9		6.2	
Tm (Nm) Maximum Current		12	12	15		18	
		19.5	12.9	17.7		18.6	

<b>Im (A)</b>				
Standstill Torque	4.4	4.4	5.5	6.6
<b>TS (Nm)</b>				
Standstill Current	6.82	4.73	6.49	6.765
<b>IS (A)</b>				
Resistance	0.8	1.83	1.03	1.258
<b>Line-Line RL (?)</b>				
Inductance	6.4	13.5	7.8	9.62
<b>Line-Line LL (mH)</b>				
Electrical Time Constant	7.9	7.37	7.57	7.64
<b>?e (ms)</b>				
Mechanical Time Constant	1.4	1.63	1.55	1.65
<b>?m (ms)</b>				
Reverse Voltage Constant Ke(V/krpm)	45	64	55	64
<b>Torque Constant</b>	0.744	1.058	0.91	1.058
<b>Kt (Nm/A)</b>				
Rotor Moment of Inertia Jm(Kg-cm <sup>2</sup> )	5.8	5.8	7.2	8.5
<b>Pole Pair Number</b>	4	4	4	4
<b>Maximum Voltage Rising du/dt(KV/?s)</b>	8	8	8	8
<b>Insulation Class</b>	F	F	F	F
Maximum Radial Force	630	630	630	630
<b>F (N)</b>				
Maximum Axial Force	315	315	315	315
<b>F (N)</b>				
Weight	6.2	6.2	7.2	8.2
<b>G(Kg)</b>				
Length of Motor	168	168	185	202
<b>L(mm)</b>				
Position Feedback			Incremental Encoder 2500ppr	
<b>Device</b>				
Cooling Method			Totally Enclosed, Non-Ventilated	
Protection Level			IP65 for Body, Shaft Sealing IP54	
Temperature			-20?~40?	
Humidity			Below 90% RH (No Condensing)	
Ambient Environment			Away from Active Gas, Combustible Gas, Oil Drops and Dust	
Altitude			Maximum Altitude 4000m, Rated Power at 1000m or Below, Above 1000m: Decreasing 1.5% Per 100m Rise	

[Servo System](#)